


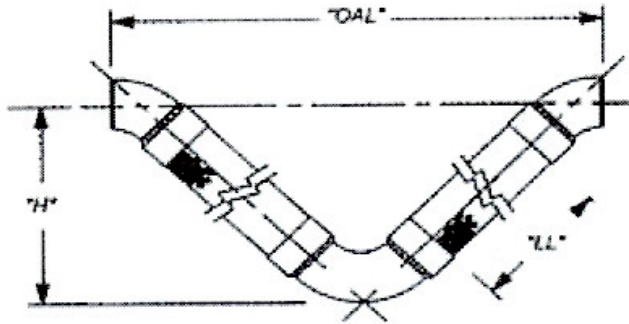

Flex/Pand/Vee Expansion Seismic Loop CS Sch 40 Grooved Ends


Grooved "Loop"
Hose: 321 SS; Braid 304SS

Elbows: CS Sch 40

Ends: Carbon Steel Sch 40, Grooved

Size (in.)	Overall Length (in.)	Height (in.)	Anchor Load (Lbs.)	Pressure Ratings (PSIG)	Allowable Motions X, Y, Z
2	38	14 1/2	82	516	2"
2 1/2	41 1/8	16	86	395	
3	45 7/8	18	93	385	
4	51 7/8	18	127	270	
5	58 7/8	23 1/2	214	225	
6	65 1/4	26	228	170	
8	77 3/8	30 1/2	312	235	
10	90	36	345	260	
12	100 3/4	40	399	160	
2	46 1/2	19	82	516	4"
2 1/2	49 5/8	20	86	395	
3	55 3/4	23	93	385	
4	62 3/8	26	127	270	
5	70 7/8	29 1/2	214	225	
6	78	32 1/2	228	170	
8	91 1/2	38	312	235	
10	106 3/8	44	345	260	
12	118 3/8	49	399	160	

Job

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

**THERMO
TECH INC.**

287 South Santa Fe Drive

Denver, Colorado 80223

Phone (303) 698-9988

www.thermotechdenver.com

**Flex/Pand/Vee
Expansion Seismic Loop**