




# Flexible Connector Type FF304 SS Plate Flanged Ends

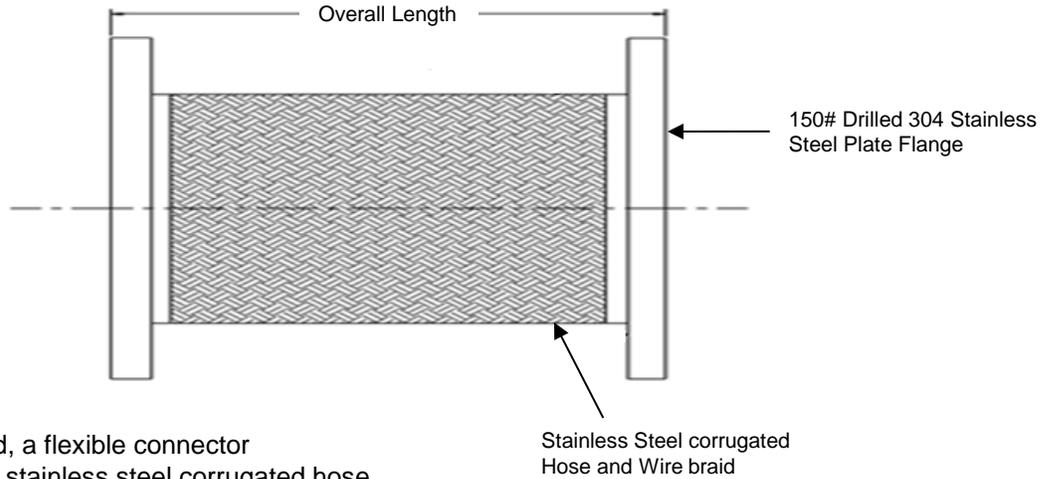

**Typical Specification:**

Provide, where indicated, a flexible connector consisting of 300 Series stainless steel corrugated hose surrounded and supported by 300 Series stainless steel braid. End fittings are to be 304 stainless steel 150# drilled plate flanged ends. Connector to be \_\_\_\_ inches nominal pipe size by \_\_\_\_ Inches overall length; **Thermo Tech model FF304 or equal.**

NOMINAL PIPE SIZE INCHES	OVERALL LENGTH INCHES	HOSE & BRAID WORKING PRESSURE PSIG
1 1/2"	9"	525
2"	9"	455
2 1/2"	9"	345
3"	9"	295
4"	9"	235
5"	11"	205
6"	11"	195
8"	12"	185
10"	13"	175
12"	14"	125
14"	14"	105

**Notes:**

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock service at 70°F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/8" lateral offset.

Job \_\_\_\_\_

Contractor \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Order No. \_\_\_\_\_ Date \_\_\_\_\_

Submitted by \_\_\_\_\_

Approved by \_\_\_\_\_ Date \_\_\_\_\_

Tag \_\_\_\_\_



287 South Sante Fe Drive  
Denver, Colorado 80223  
Phone (303) 698-9988  
www.thermotechdenver.com

**Flexible Connector  
Type FF304**