




# Flexible Connector Type FFN Carbon Steel Male Ends

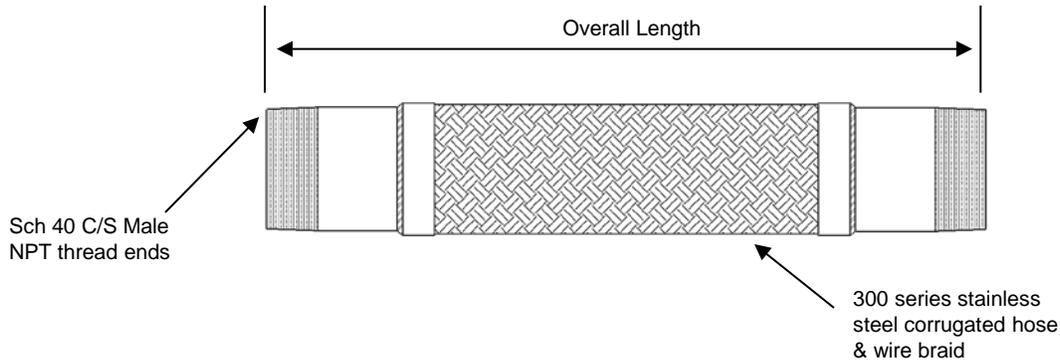

**Typical Specification:**

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be carbon steel Schedule 40 pipe nipples. Connector to be \_\_\_\_ inches nominal pipe size by \_\_\_\_ inches overall length; **Thermo Tech model FFN or equal.**

**Notes:**

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock service at 70°F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/4" lateral offset.

NOMINAL PIPE SIZE INCHES	OVERALL LENGTH INCHES	HOSE & BRAID WORKING PRESSURE PSIG
1/2"	10"	995
3/4"	10"	750
1"	10"	605
1 1/4"	10"	570
1 1/2"	12"	525
2"	14"	455
2 1/2"	16"	345
3"	16"	290
4"	16"	235

Job \_\_\_\_\_

Contractor \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Order No. \_\_\_\_\_ Date \_\_\_\_\_

Submitted by \_\_\_\_\_

Approved by \_\_\_\_\_ Date \_\_\_\_\_

Tag \_\_\_\_\_



287 South Sante Fe Drive  
Denver, Colorado 80223  
Phone (303) 698-9988  
www.thermotechdenver.com

**Flexible Connector  
Type FFN**