




Flexible Connector Type FFN-304 Stainless Steel Male Ends

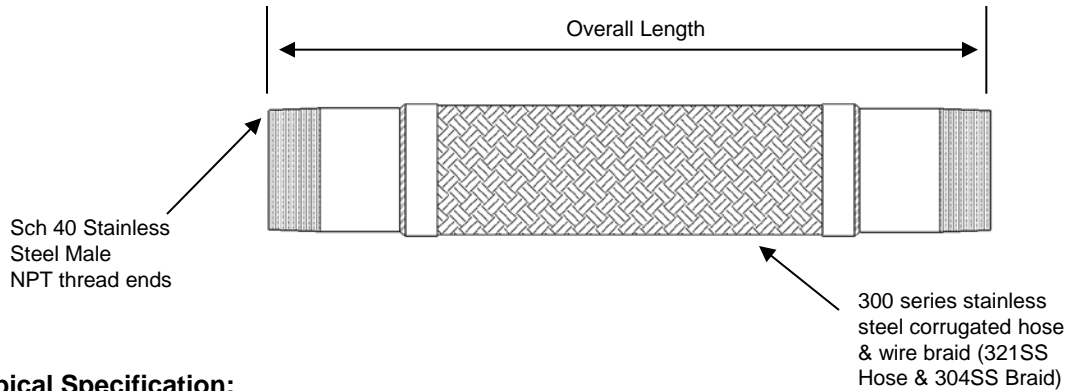

Typical Specification:

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be stainless steel Schedule 40 pipe nipples. Connector to be ____ inches nominal pipe size by ____ Inches overall length; **Thermo Tech model FFN304 or equal.**

NOMINAL PIPE SIZE INCHES	OVERALL LENGTH INCHES	HOSE & BRAID WORKING PRESSURE PSIG
1/2"	10"	995
3/4"	10"	750
1"	10"	605
1 1/4"	10"	570
1 1/2"	12"	525
2"	14"	455
2 1/2"	16"	345
3"	16"	290
4"	16"	235

Notes:

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock service at 70°F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/4" lateral offset.

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

**THERMO
TECH INC.**

287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Flexible Connector
Type FFN-304**