




Flexible Connector

Type FFN-GAS Male NPT Ends

(Also available with weld or flanged ends)

Sch 40 Carbon
Steel Male
NPT thread ends

Overall Length

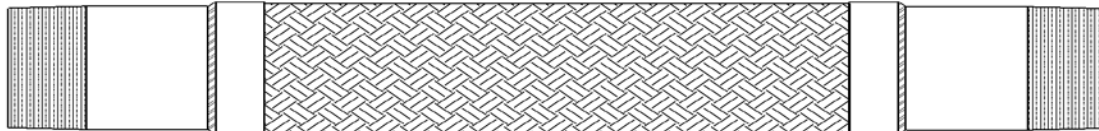

300 series stainless
steel corrugated hose
& wire braid

CSA Approved Gas Connectors

Notes:

Maximum working pressure is based on non-shock service at 70°F.

Stainless Steel Corrugated Braided Hose Construction

Not designed for extension or compression applications

Install the connectors without torque, sharp bends, or any excessive offset.

Available with C/S Schedule 80 Hex Male NPT, Schedule 80 Beveled Weld End Fittings, 300#ANSI RFSO Flanged Ends, or 150# Weld Neck Flanged Ends

NOMINAL PIPE SIZE INCHES	MIN BEND RADIUS	HOSE & BRAID WORKING PRESSURE PSIG
1/2"	1 1/2"	350
3/4"	2 1/4"	350
1"	2 3/4"	350
1 1/4"	3 1/2"	350
1 1/2"	4"	350
2"	5"	350
2 1/2"	8"	350
3"	9"	350
4"	13"	350

Job

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

**THERMO
TECH INC.**

287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

Flexible Connector
Type FFN-GAS, FFW-GAS, FFF-GAS