




## CONVOLUTED TEFLON\* HOSE 316 SS Reinforcing Braid Cover

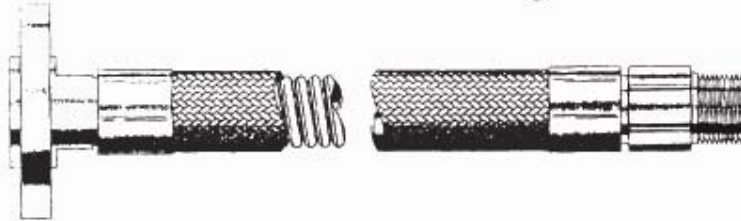

Convoluted White Seamless FDA Teflon® Lined Hose with T316 Stainless Steel Reinforcing Braid. Self Cleaning Helical Design.

Available in 1/4" through 4" Diameters with Stainless Steel, Male NPT, Female JIC Swivel, Sanitary Clamp or Bevel Seat, Cam & Groove and 150# or 300# Floating Flange Ends

Temperature Range of - 20 to + 350° F / Pressure and Full Vacuum Ratings @ 70° F

### Seamless SS Braided Convoluted Teflon® Hose Full Vacuum Rated

Nominal Pipe Size	Part Number	Working Pressure	Bend Radius
1/4"	04TTCW	1500 PSI	1.00"
3/8"	06TTCW	1500 PSI	1.50"
1/2"	08TTCW	1400 PSI	2.00"
3/4"	12TTCW	1300 PSI	2.75"
1"	16TTCW	1100 PSI	4.00"
1 1/2"	24TTCW	700 PSI	6.00"
2"	32TTCW	500 PSI	7.50"
3"	48THCW	350 PSI	14.0"
4"	64THCW	275 PSI	16.0"

**THERMO  
TECH INC.**

287 South Santa Fe Drive  
Denver CO 80223  
Phone 303 698 9988  
Fax 303 698 2184  
[www.ThermoTechDenver.com](http://www.ThermoTechDenver.com)

Solving piping vibration, noise, and motion problems since 1954