




SANITARY F/J/R Equipment Connector Expansion Joint

SUBMITTAL


TT-10

Siloflex® Rubber Lined



Job	_____
Contractor	_____
Engineer	_____
Representative	_____
Order No.	_____ Date _____
Submitted by	_____
Approved by	_____ Date _____
Tag	_____

Nominal Size Inches	Flange O. D. Inches	Neutral Length Inches	Max Travel Inches	Max +/- Offset Inches	Working Pressure PSIG
1 1/2	5	4	1/4	1/8	150
2	6	4	1/4	1/8	150
2 1/2	7	4	1/4	1/8	150
3	7 1/2	6	3/8	1/8	150
4	9	6	3/8	1/8	150
5	10	6	3/8	1/8	150
6	11	6	3/8	1/8	150
8	13 1/2	8	1/2	1/8	150
10	16	8	1/2	1/8	150
12	19	8	1/2	1/8	150

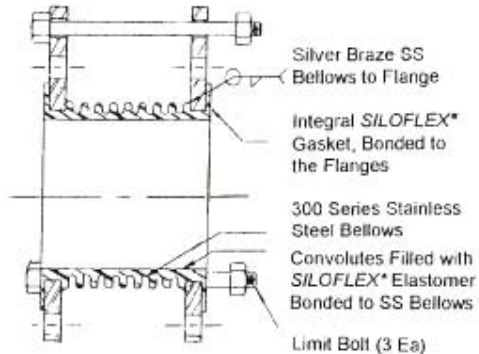

150 Lb ANSI Drilled Flange with Integral Lugs, Each End

For food and beverage applications:
(Sanitary F/J/R Model 1509 / 1909)

Food Grade FDA SILOFLEX® liner & integral gasket.
150# ANSI drilled T304 Stainless Steel flanged ends.

Notes:

Standard Working Pressure is 150 PSIG;
300 PSIG Models are also available.

Working Pressure is based on no shock
and the connector being fully restrained.

Maximum Travel is based on installation
with no misalignment or angular deflection.

Maximum Offset is based on installation
with no travel or angular deflection.

Maximum Operating Temperature is 300 F.

**THERMO
TECH INC.**

287 South Santa Fe Drive
Denver CO 80223
Phone 303 698 9988
Fax 303 698 2184
www.ThermoTechDenver.com