




# Flexible Connector

## Type FF/304

### S/S Plate Flange Ends

**SUBMITTAL**

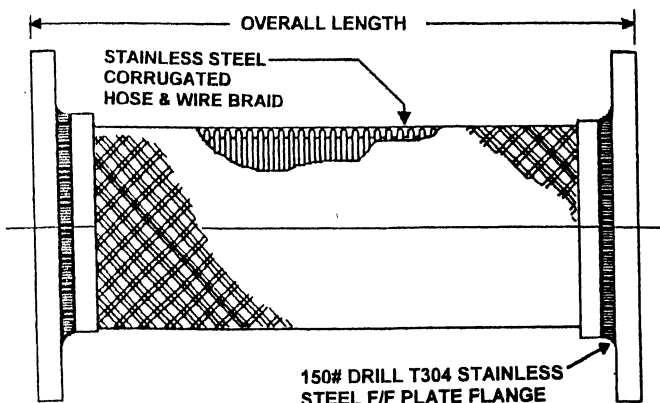

|                              |
|------------------------------|
| Job _____                    |
| Contractor _____             |
| Engineer _____               |
| Representative _____         |
| Order No. _____ Date _____   |
| Submitted by _____           |
| Approved by _____ Date _____ |
| Tag _____                    |

**Notes:**

**Special lengths, end fittings, and higher pressure ratings are available.**

**Maximum working pressure is based on non-shock fluid service at 70° F.**

**Braided metal connectors are not designed for compression or extension.**

**Install the connectors without torque, sharp bends, or any excessive offset.**

**This connector dampens vibration and accommodates 1/8" lateral offset.**

| Nominal Pipe Size<br>Inches | Overall Length<br>Inches | Hose & Braid Working<br>Pressure PSIG |
|-----------------------------|--------------------------|---------------------------------------|
| 2                           | 9                        | 455                                   |
| 2 1/2                       | 9                        | 345                                   |
| 3                           | 9                        | 295                                   |
| 4                           | 9                        | 235                                   |
| 5                           | 11                       | 205                                   |
| 6                           | 11                       | 195                                   |
| 8                           | 12                       | 185                                   |
| 10                          | 13                       | 175                                   |
| 12                          | 14                       | 165                                   |

**Typical Specification:**

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be stainless steel 150# drilled plate flanges. Connector to be \_\_\_\_\_ inches nominal pipe size by \_\_\_\_\_ inches overall length; **Thermo Tech model F/F/304 or equal.**



287 South Sante Fe Drive  
 Denver, Colorado 80223  
 Phone (303) 698-9988  
[www.thermotechdenver.com](http://www.thermotechdenver.com)

***Solving piping vibration, noise, and motion problems since 1954***

Flexible Metal Connectors & Hoses      FF/304 0310