




Flexible Connector

Type FF/ANSI

Forged Steel R/F Flange Ends

SUBMITTAL

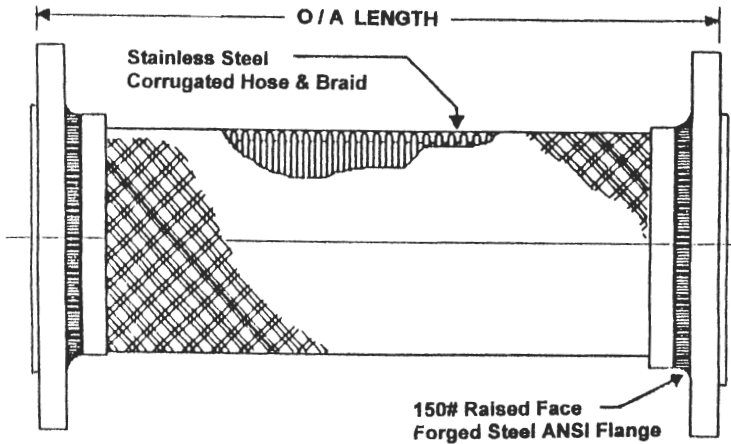

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

Notes:

Special lengths, end fittings, and higher pressure ratings are available.

Maximum working pressure is based on non-shock fluid service at 70° F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/8" lateral offset.

Nominal Pipe Size Inches	Overall Length Inches	Hose & Braid Working Pressure PSIG
2	9	455
2 1/2	9	345
3	9	295
4	9	235
5	11	205
6	11	195
8	12	185
10	13	175
12	14	165

Typical Specification:

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be **forged steel 150# ANSI R/F flanges**. connector to be _____ inches nominal pipe size by _____ inches length; **Thermo Tech model F/F/ANSI or equal.**



287 South Sante Fe Drive
 Denver, Colorado 80223
 Phone (303) 698-9988
www.thermotechdenver.com

Solving piping vibration, noise, and motion problems since 1954

Flexible Metal
 Connectors & Hoses

F/F/ANSI
 0310