Flexible Connector Type F/F/GXG

SUBMITTAL

Grooved Ends

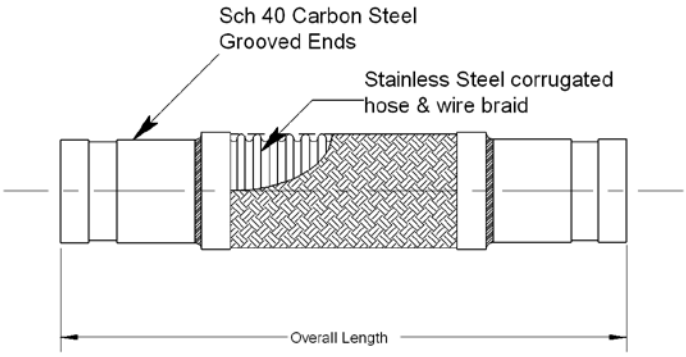

Job

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by_____

Approved by _____ Date _____

Tag _____

NOMINAL PIPE SIZE	OVERALL LENGTH	HOSE & BRAID WORKING PRESSURE PSIG
2”	12”	455
2 ½”	14”	345
3”	14”	295
4”	16”	235
5”	17”	205
6”	18”	195
8”	20”	185
10”	24”	175
12”	25”	125

Typical Specification:
Provide, where indicated, a flexible connector consisting of 300 series stainless steel hose surrounded and supported by 300 series stainless steel braid. End fittings are to be carbon steel Schedule 40 grooved pipe. Connector to be ___ inches nominal pipe size by ___ inches overall length; **Thermo Tech model F/F/GXG or equal.**

Notes:

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock fluid service at 70° F.

Braided metal connectors are not designed for compression and extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/8” lateral offset.

THERMO TECH INC.

287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com