




Flexible Connector

Type F/F/N

Carbon Steel Male NPT Ends

SUBMITTAL

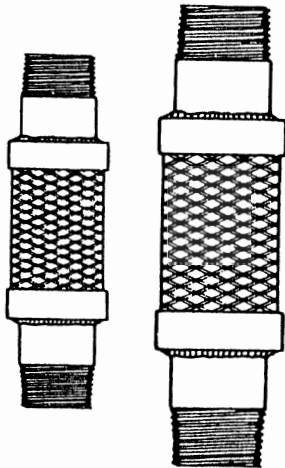

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

Nominal Pipe Size Inches	Overall Length Inches	Hose & Braid Working Pressure PSIG
1/2	10	995
3/4	10	755
1	10	605
1 1/4	10	575
1 1/2	12	525
2	14	455
2 1/2	16	345
3	16	295

Notes:


Special lengths, end fittings, and higher pressure ratings are available.

Maximum working pressure is based on non-shock fluid service at 70° F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/4" lateral offset.

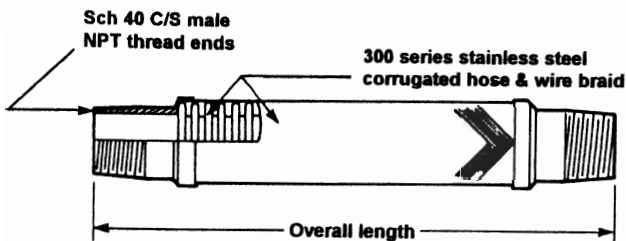

Typical Specification:

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be carbon steel Schedule 40 pipe nipples. connector to be _____ inches nominal pipe size by _____ inches overall length; **Thermo Tech** model F/F/N or equal.

**THERMO
TECH INC.**

287 South Sante Fe Drive
 Denver, Colorado 80223
 Phone (303) 698-9988
www.thermotechdenver.com

Solving piping vibration, noise, and motion problems since 1954

Flexible Metal
 Connectors & Hoses

F/F/N
 0310