




Flexible Connector

Type F/F/N304

Stainless Steel Male Ends

SUBMITTAL

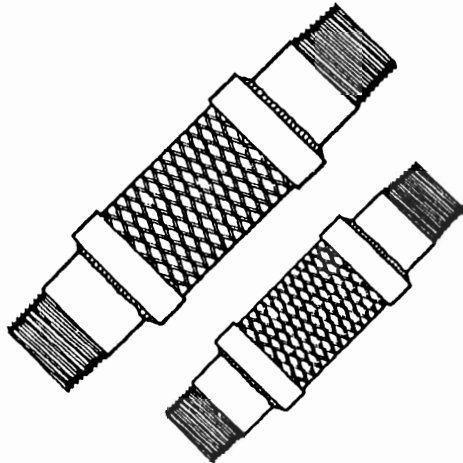

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

Nominal Pipe Size Inches	Overall Length Inches	Hose & Braid Working Pressure PSIG
1/2	10	995
3/4	10	755
1	10	605
1 1/4	10	575
1 1/2	12	525
2	14	455
2 1/2	16	345
3	16	295

Notes:


Special lengths, end fittings, and higher pressure ratings are available.

Maximum working pressure is based on non-shock fluid service at 70° F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/4" lateral offset.

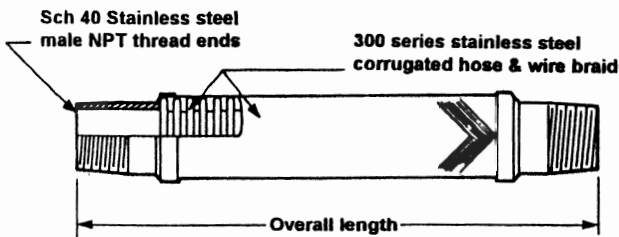

Typical Specification:

Provide, where indicated, a flexible connector consisting of 300 series stainless steel corrugated hose surrounded and supported by 300 series stainless steel braid. End fittings are to be stainless steel Schedule 40 pipe nipples. connector to be _____ inches nominal pipe size by _____ inches in length; **Thermo Tech model F/F/N304 or equal.**

**THERMO
TECH I N C.**

287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

Solving piping vibration, noise, and motion problems since 1954

Flexible Metal
Connectors & Hoses

F/F/N304
0310