



287 South Santa Fe Drive
Denver, Colorado 80223
Phone: (303) 698-9988
Fax: (303) 698-2184

Installation Instructions Sanitary Hose

This hose was carefully inspected at the factory before packing and shipment. The hose should be inspected on receipt for any damage during shipment.

If you find the hose was damaged during shipment, notify and file a claim with the delivering carrier.

Protect the hose from sharp or abrasive surfaces in storage and during installation. Handle the hose with care and avoid any abuse in storage or in service. Don't kink the hose. After the hose is put in service, inspect it periodically for bulges, soft spots, or loosened couplings.

Don't twist, stretch, compress, or force the hose during installation. Avoid excessive offset, bending in a short radius, and tight "S" bends. Don't bend the hose sharply near the end fittings. Make a smooth shallow curve along the entire length of the hose.

When installing a hose with threaded connections, don't impose torque when making up to piping. Use two wrenches with one of the wrenches backing-up, and don't put a wrench on the ferrule or on the hose. Use the wrench on the end fitting or hex.

If you clean the hose with caustic or other solutions, rinse the hose thoroughly with clean water. Intermittent, low pressure, open end steam may also be used for cleaning.



Never install a hose where its temperature or pressure ratings could be exceeded. Know the temperature and pressure ratings of the hose you're working with and of the system where you're installing it.

On a straight run of hose, allow enough extra slack when making connections to accommodate any changes in hose length when the hose assembly is pressurized. Be sure to change pressure on the hose gradually to avoid surges.

Don't install this hose to carry hazardous, dangerous, or toxic substances.



Installing THERMO TECH hose for long service life

Use angle adaptors or elbows, in the piping or at the hose ends, to avoid sharp twists or tight bends in the installed hose.

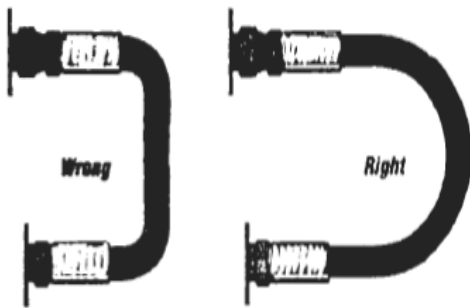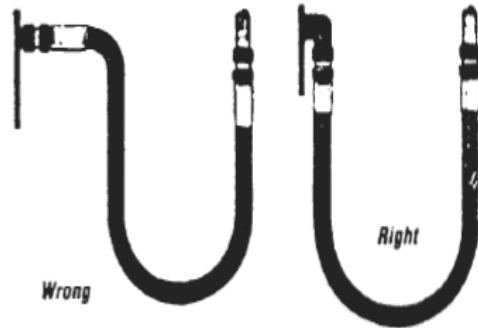

Always install a hose with the radius large enough at the bend to avoid collapse or any flow restriction. Don't allow the hose to bend sharply near the end fittings.

The hose must bend in the same plane as any moving equipment it is attached to. Don't install the hose to move in more than one plane, in order to prevent twisting, torquing, or distortion.

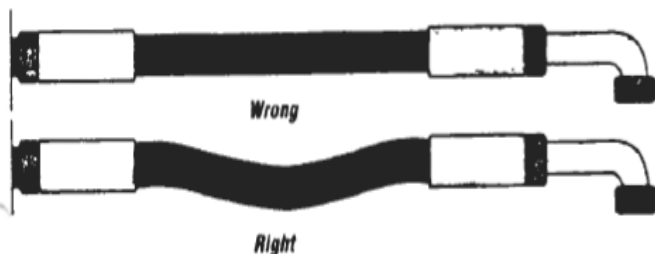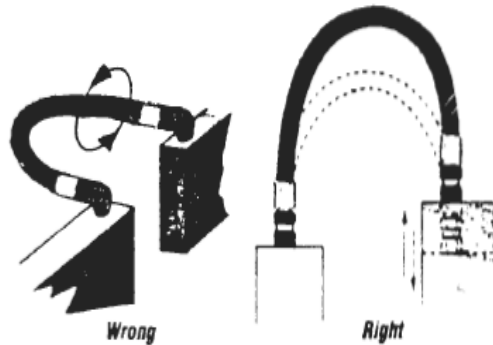

On a straight run of hose, allow enough extra slack when making connections to accommodate any changes in hose length when the hose assembly is pressurized.