




Flex/Pand/Vee Expansion Seismic Loop CS Sch 40 Male NPT Ends

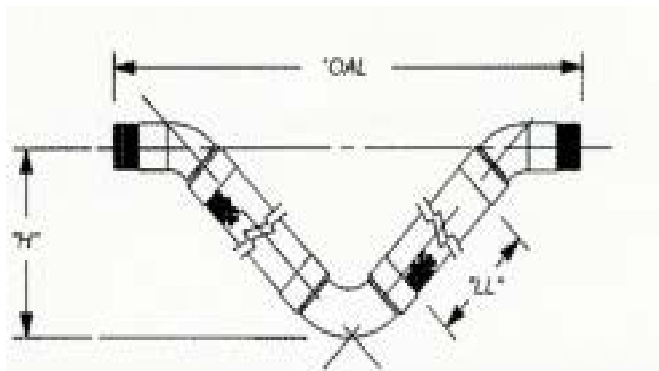

Threaded "Loop"

Hose: 321 SS; Braid 304SS

Elbows: CS Sch 40

Ends: Carbon Steel Sch 40, Male NPT

Size (in.)	Overall Length (in.)	Height (in.)	Anchor Load (Lbs.)	Pressure Ratings (PSIG)	Allowable Motions X, Y, Z
1/2	22 1/4	9 1/4	75	1335	2"
3/4	23 3/4	9 3/4	82	1135	
1	27 1/2	10 3/4	86	795	
1 1/4	29 3/4	12	93	610	
1 1/2	31 1/2	12 1/2	127	530	
2	35 1/2	14 1/2	214	516	
2 1/2	39 1/2	15 1/2	228	395	
3	45 1/2	17 3/4	312	385	
4	51 1/2	20	345	270	
1/2	28 1/2	12 1/4	75	1335	4"
3/4	30 3/4	13 1/4	82	1135	
1	34 1/2	14 1/2	86	795	
1 1/4	37	15 1/2	93	610	
1 1/2	39 1/4	16 1/2	127	530	
2	44	18 1/2	214	516	
2 1/2	48	22 3/4	228	395	
3	55 1/4	23 1/2	312	385	
4	64	25 1/2	345	270	

Job

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____

**THERMO
TECH INC.**

287 South Santa Fe Drive

Denver, Colorado 80223

Phone (303) 698-9988

www.thermotechdenver.com

**Flex/Pand/Vee
Expansion Seismic Loop**